


ECHO-PIEZO TRANSDUCER

B35 SERIES

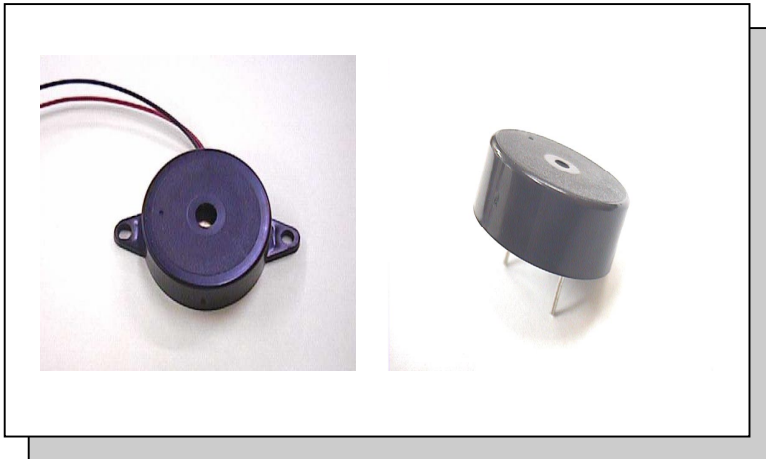


FEATURES:


- Medium to loud sound output
- Low current consumption
- Extremely durable & long life
- Multi-tone
- Screw/PCB mounting
- Operating temperature -20°C -- $+70^{\circ}\text{C}$
- Storage temperature -30°C -- $+70^{\circ}\text{C}$

DIMENSIONS:

(unit: mm)

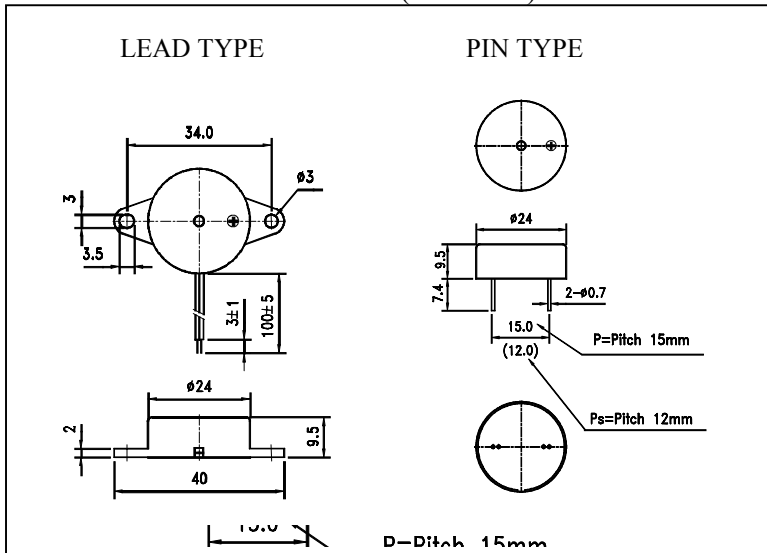

CHARACTERISTICS:

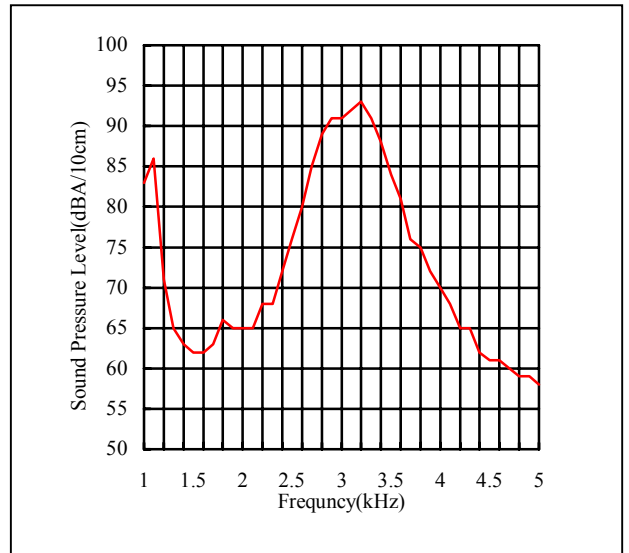


SPECIFICATIONS:

Model No.	Input Voltage Max (Vp-p)	Current Consumption (Max)(mA)	Resonant Frequency (kHz)	Sound Pressure Level(Min) at 5Vp-p Square Wave Res. Frequency 10cm(dB)	Operating Temperature (°C)	Storage Temperature (°C)	Terminal
B35B03L	25	3.5	3.2±0.5	85	-20~+60	-30~+60	LEAD/PIN
B35B35L	25	5.0	3.5±0.5	90	-20~+60	-30~+60	LEAD/PIN

ECHO-PIEZO TRANSDUCER

B35 SERIES

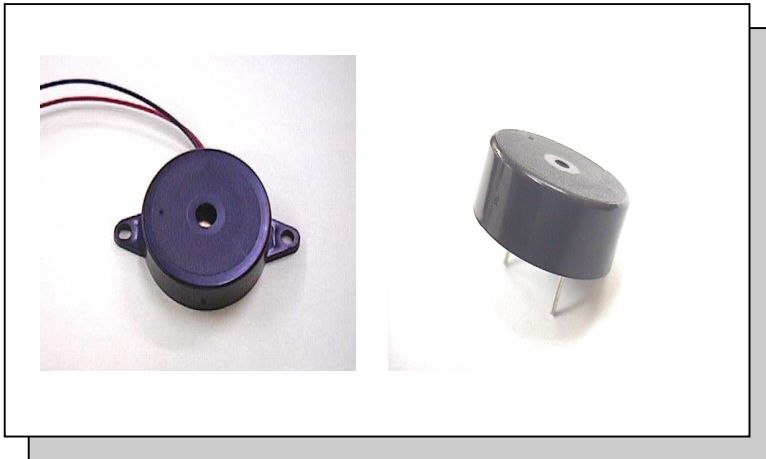


FEATURES:


- Medium to loud sound output
- Low current consumption
- Extremely durable & long life
- Multi-tone
- Screw/PCB mounting
- Operating temperature -20°C -- $+70^{\circ}\text{C}$
- Storage temperature -30°C -- $+70^{\circ}\text{C}$

DIMENSIONS:

(unit: mm)

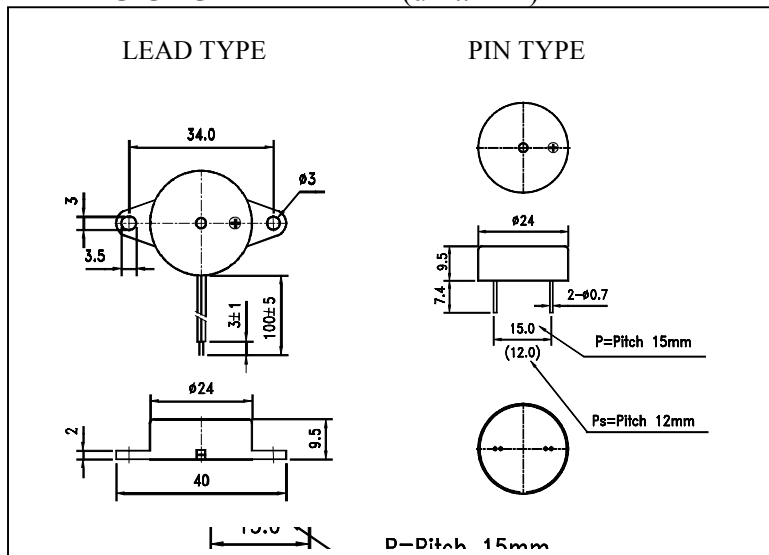

CHARACTERISTICS:

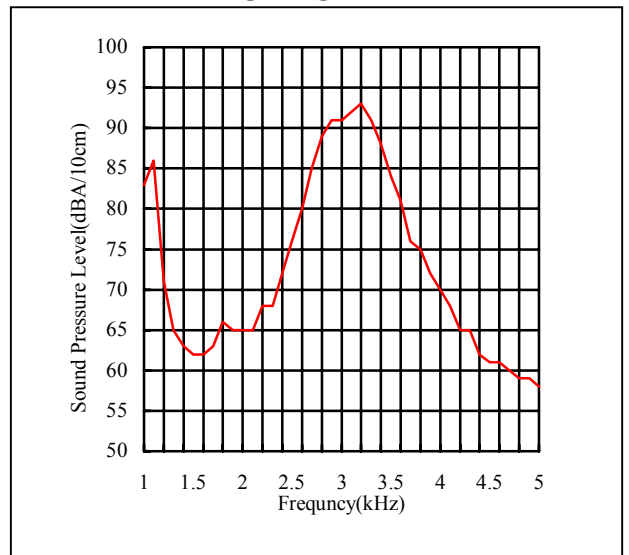

SPECIFICATIONS:

Model No.	Input Voltage Max (Vp-p)	Current Consumption (Max)(mA)	Resonant Frequency (kHz)	Sound Pressure Level(Min) at 5Vp-p Square Wave Res. Frequency 10cm(dB)	Operating Temperature (°C)	Storage Temperature (°C)	Terminal
B35B03L	25	3.5	3.2±0.5	85	-20~+60	-30~+60	LEAD/PIN
B35B35L	25	5.0	3.5±0.5	90	-20~+60	-30~+60	LEAD/PIN